

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
WO 2004/089181 A2

(51) International Patent Classification<sup>7</sup>:

A61B

(21) International Application Number:

PCT/AU2004/000486

(22) International Filing Date: 14 April 2004 (14.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003901738

14 April 2003 (14.04.2003) AU

(71) Applicant (for all designated States except US): NILNAV  
ORTHOPAEDICS PTY LIMITED [AU/AU]; 491 West-  
lake Drive, Riverhills, QLD 4074 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SHERRY, Eugene  
[AU/AU]; 108 Lethbridge Street, Penrith, NSW 2750 (AU).  
EGAN, Michael [AU/AU]; 62 Tulloch Street, Blacktown,  
NSW 2148 (AU). LYE, Bob [AU/AU]; 6 Roger Street,  
Brookvale, NSW 2100 (AU).

(74) Agent: SHELSTON IP; 60 Margaret Street, Sydney NSW  
2000 (AU).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished  
upon receipt of that report

[Continued on next page]

(54) Title: A SUPPORT ARRANGEMENT FOR USE IN SUPPORTING A BONE DURING A SURGICAL OPERATION

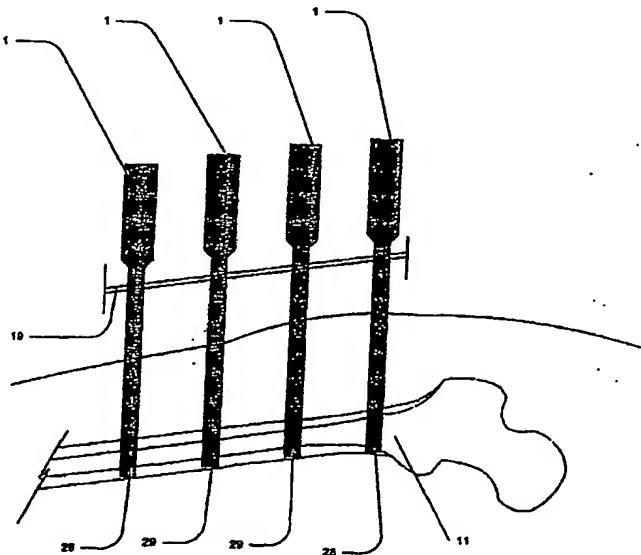

(57) Abstract: A support arrangement for use in supporting a bone (11) during a surgical operation. The arrangement includes one or more supports (1) located by a guide means (19), each support including means (6, 7) to fit around and support said bone during said operation.

BEST AVAILABLE COPY

WO 2004/089181 A2

WO 2004/089181

PCT/AU2004/000486

1

**TITLE: A SUPPORT ARRANGEMENT FOR USE IN SUPPORTING A BONE  
DURING A SURGICAL OPERATION**

**FIELD OF THE INVENTION**

The present invention relates to methods for surgery and in particular to a method for  
5 removing unwanted material from within a bone. It has been developed primarily for  
removing bonding material from within a femur during hip revision surgery and will be  
described hereinafter with reference to this application. However, it will be appreciated  
that the invention is not limited to this particular field of use.

**BACKGROUND OF THE INVENTION**

10 Prior art hip replacement surgical techniques typically involve a surgeon firstly  
making a fairly large initial incision so as to reveal the hip joint. The surgeon then  
typically manipulates the leg of the patient to dislocate the hip bone. This often requires  
the application of significant force to effect dislocation. Excessive manipulation and  
application of force may cause collateral damage to the patient, possibly resulting in post  
15 operative pain and/or an extended healing time. The head of the femur is then cut off at  
the neck. A cavity is reamed into the hip to accept a prosthetic acetabular cup (for  
example a LINK T.O.P. Acetabular Cup) and a prosthetic stem (for example a LINK  
C.F.P. Hip Stem) is inserted into the femoral shaft. A bonding agent, such as surgical  
cement, is typically used to bond the prosthetic acetabular cup into the cavity in the hip  
20 and to bond the prosthetic stem to the femoral shaft. Typically, the surgeon aligns the  
cutting and reaming tools by eye, possibly resulting in minor misalignments. Hence,  
once the prosthetics are installed, there may be visually imperceptible misalignments  
between the prosthetic acetabular cup and the prosthetic femoral head. This may result  
in problems such as misalignment of the leg, incorrect leg length and/or incorrect soft  
25 tissue tension. Additionally, in the long term, misaligned prosthetic components may

wear more quickly, giving rise to aseptic loosening of components and potentially necessitating early repetition of the surgery.

Due to prosthetic component wear over time giving rise to aseptic loosening of components, many patients require repetition of the surgery. This repetition of surgery or hip revision surgery involves replacement of the prosthetic components. It is therefore necessary to remove the worn out components so that they can be replaced with new prosthetics. The removal techniques typically involve a surgeon removing or chipping the old cement away from within the femur and hip of the patient, so that the new prosthetics can be installed. While the surgeon is removing the old cement, there is a risk that the chipping will cause the bone to collapse and break. This can result in complications to the surgery.

Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of the common general knowledge in the field.

## 15 DISCLOSURE OF THE INVENTION

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

It is an object of the present invention in its preferred form to provide a method for more safely removing unwanted material from within the femur of a patient during hip revision surgery.

According to one aspect of the invention there is provided a method of removing unwanted material from within a cavity of a bone during surgery, said method including the steps of:

- a) exposing said bone;

- b) applying at least one support means to said bone to support the structure of said bone; and
- c) removing said material from within said bone cavity.

According to a second aspect the present invention provides a support arrangement  
5 for use in supporting a bone during a surgical operation, the arrangement including one or more supports located by a guide means, each support including means to fit around and support said bone during said operation.

Preferably, said support means or support includes a surgical tool guide means to guide a cutting tool for removing said material.

10 For preference, the support means or support is a surgical clamp including two arms hingedly connected at substantially their proximal ends, each of said arms respectively including one of a pair of opposable gripping formations at its distal end. Preferably, the surgical clamp includes an adjustment means for selectively moving said arms into and out of gripping engagement with the bone. Preferably, the adjustment means is located  
15 at or adjacent said proximal ends of the arms. The adjustment means may include a shaft threadedly engaged through one said arm; a handle located at one end of said shaft; and an abutment portion located at the other end of said shaft such that relative rotation of said handle brings said abutment portion into and out of abutment with the other said arm thereby moving said gripping formations into and out of gripping engagement. The  
20 gripping formations are preferably concave to fit snugly around the outer surface of the bone.

Preferably, a plurality of support means are positioned along the bone to fully support it along its length. Desirably, each support means is aligned relative to the longitudinal axis of the bone cavity.

For preference, the surgical tool guide means includes a guide rail mounted to at least one of said arms wherein said guide rail is adapted to receive a guide display for displaying the orientation of said bone. Preferably, the guide display is a guide rod slidably mounted to the guide rail. In some embodiments the guide rail is movably  
5 mounted to at least one of the arms. In other embodiments the guide rail is fixedly mounted to at least one of the arms.

According to a third aspect the present invention provides a surgical chisel for use in the method of the first aspect, said chisel including:

- a shaft having a hollow portion adjacent a cutting end;
- 10 an abutment portion at the other end of said shaft;
- the hollow portion having tapering internal walls extending inwardly towards a central axis of the shaft to define a cutting edge at said cutting end.

Preferably, the hollow portion extends along a major portion of the length of said shaft. For preference, said shaft is generally circular in cross section.

- 15 In another aspect, the present invention provides a method of performing hip revision surgery on a patient, said method including the steps of:

- a) exposing a femoral bone formation of said patient;
- b) applying at least one support means to said femoral bone formation to support the structure of femoral formation; and
- 20 c) removing unwanted material from within said femoral bone formation.

Preferably, the method further includes the step of:

- d) extracting a first implant from within said femoral bone formation.

Even more preferably, the method further includes the step of:

- e) inserting a second implant into said femoral bone formation.

Preferably also, the support means is a surgical clamp including two arms hingedly connected at substantially their proximal ends, each of the arms respectively including one of a pair of opposable gripping formations at its distal end.

More preferably step a) includes exposing the femoral bone of the patient through at least two incisions adjacent the bone.

Even more preferably, step b) includes applying the gripping formations to the femoral bone formation through the at least two incisions adjacent the bone.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a front view of a surgical clamp according to the preferred embodiment of the invention shown supporting a femoral bone formation;

Figure 2 is a side view of the surgical clamp shown in Figure 1;

Figure 3 is an enlarged front view of an adjusting formation according to a preferred embodiment of the present invention;

Figure 4 is a side view of the adjusting formation shown in Figure 3;

Figure 5 is an enlarged cut-away view of a guide rail according to a preferred embodiment of the present invention;

Figure 6 is a front view of a surgical cutting tool according to a preferred embodiment of the present invention; and

Figure 7 is a depiction of a femoral shaft illustrating a preferred embodiment of the invention shown supporting the structure of the femoral shaft.

#### **PREFERRED EMBODIMENT OF THE INVENTION**

Referring to the drawings, the support means in the form of a surgical clamp includes two arms 2 and 3. The arms are hingedly connected at substantially their

proximal ends 4 and 5. Each of the arms respectively includes one of a pair of  
opposable gripping formations 6 and 7 at its distal end 8. In this embodiment, the  
gripping formations are concave, however in other embodiments the gripping formations  
take other shapes, for example in one preferred embodiment they are flat. The surgical  
5 clamp 1 includes an adjusting formation 9 for selectively moving the arms 2 and 3 into  
and out of gripping engagement with the outer surface 10 of a femoral bone formation  
11. The adjusting formation includes a shaft 12 threadedly engaged through one of the  
arms 3. A handle 13 is located at one end 14 of the shaft 12 and an abutment portion 15  
is located at the other end 16 of the shaft. Relative rotation of the handle 13 selectively  
10 brings the abutment portion 15 into and out of abutment with the other arm 2, thereby  
moving the gripping formations 6 and 7 into and out of gripping engagement. A surgical  
tool guide means, in the form of a guide rail 17, is fixedly mounted to arm 3 to guide a  
cutting tool for removing unwanted material such as glue or cement from within the  
femoral bone formation 11. The guide rail 17 is adapted to receive a guide display, in  
15 the form of a guide rod 19, which is slidably mounted to the guide rail 17 for displaying  
the orientation of femoral bone formation 11.

Referring to Figure 6 there is shown a cutting tool in the form of surgical chisel 20.  
The chisel 20 includes a hollow shaft 21 and an abutment portion 22 at one end 23 of the  
shaft. A cutting end 24 is provided at the other end of the shaft 21. The cutting end has  
20 inwardly tapering walls 25 and 26 which define a cutting edge 27.

Referring to Figure 7, in use, a number of the clamps 1 are inserted by the surgeon  
through incisions adjacent the bone and positioned with gripping formations 6 and 7  
around the bone formation 11. In this embodiment each gripping formation 6 and 7 is  
applied to the bone formation 11 through separate respective incisions (not shown). The  
25 arms 2 and 3 are then adjusted by the handle 13 to bring the formations 6 and 7 into

supporting engagement of the bone formation 11. Each clamp is aligned respective to each other and the bone formation by guide rail 17. As each clamp is of the same length, the guide rail 17 extends generally parallel to and provides a guide as to the longitudinal axis of the bone formation. The rod 19 attached to the rail can thus be used to guide a surgical tool used for cleaning out the cavity of the bone formation.

Once the bone is fully supported by the clamps, the surgeon can commence chiselling removal of cement or other unwanted material from the cavity of the bone formation 11 using chisel 20. It will be appreciated that some implants are not cemented or bonded into place and that the preferred embodiment of the invention may be used in either of those situations. The configuration of the chisel 20 allows waste material to be captured and withdrawn by means of the hollow portion. Some examples of waste material include waste particles, elements of chronic inflammation and generated waste particles. The chisel is typically dimensioned so as to fit neatly within the bone cavity and allow alignment with the guide rod 19. It will be apparent to those in the art that a variety of other means can be used to remove unwanted material from the bone cavity provided the bone is adequately supported during removal.

While in the preferred embodiment the guide rail 17 is fixedly mounted to arm 3, in other embodiments it is movably mounted to the arm. For example, when used in the configuration as shown in Figure 7, the outer surgical clamps 28 may have guide rails that are fixedly mounted, while the inner clamps 29 may have guide rails that are movably mounted. This is beneficial as in some instances the femoral bone formation 11 may have an outer edge which deviates from straight and if one of the clamps is applied to such a deviation, this may cause the guide rails 17 to misalign. Therefore if the one of the inner clamps 29 is applied to such a deviation, having a movable guide rail 17 facilitates the insertion of the guide rod 19.



In situations where the hip or other implant is not cemented in place, it may not be possible to remove the implant prior to application of the clamps 1 as described above. In such a case the clamps 1 are firstly applied to hold the bone and are used as a guide while removing the implant.

- 5 It will be appreciated that the preferred embodiment and/or modified versions of the preferred embodiment can be applied to the insertion and extraction of a wide variety of implants and its uses are not limited to hip revision surgery. For example, a preferred embodiment of the present invention is adapted for use in the methods and with the apparatus disclosed in co-pending patent application no. PCT/AU02/01482 (WO
- 10 03/037192), the contents of which are hereby incorporated in their entirety by way of reference.


## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A method of removing unwanted material from within a cavity of a bone during surgery, said method including the steps of:
  - a) exposing said bone;
  - 5 b) applying at least one support means to said bone to support the structure of said bone; and
  - c) removing said material from within said bone cavity.
2. A support arrangement for use in supporting a bone during a surgical operation, the arrangement including one or more supports located by a guide means, each support  
10 including means to fit around and support said bone during said operation.
3. A support arrangement according to claim 2 wherein said support means or support includes a surgical tool guide means to guide a cutting tool for removing said material.
4. A support arrangement according to claim 3 wherein said support means or  
15 support is a surgical clamp including two arms hingedly connected at substantially their proximal ends, each of said arms respectively including one of a pair of opposable gripping formations at its distal end.
5. A support arrangement according to claim 4 wherein said surgical clamp includes an adjustment means for selectively moving said arms into and out of gripping  
20 engagement with said bone.
6. A support arrangement according to claim 5 wherein said adjustment means is located at or adjacent said proximal ends of said arms.
7. A support arrangement according to claim 6 wherein said adjustment means includes a shaft threadedly engaged through one said arm; a handle located at one end of  
25 said shaft; and an abutment portion located at the other end of said shaft such that

relative rotation of said handle brings said abutment portion into and out of abutment with the other said arm thereby moving said gripping formations into and out of gripping engagement.

8. A support arrangement according to claim 7 wherein said gripping formations  
5 are concave to fit snugly around the outer surface of said bone.
9. A support arrangement according to claim 8 wherein a plurality of support means are positioned along said bone to fully support it along its length.
10. A support arrangement according to claim 9 wherein each support means is aligned relative to the longitudinal axis of said bone cavity.
- 10 11. A support arrangement according to claim 10 wherein said surgical tool guide means includes a guide rail mounted to at least one of said arms wherein said guide rail is adapted to receive a guide display for displaying the orientation of said bone.
12. A support arrangement according to claim 11 wherein said guide display is a guide rod slidably mounted to said guide rail.
- 15 13. A support arrangement according to claim 12 wherein said guide rail is movably mounted to at least one of said arms for facilitating insertion of said guide rod.
14. A support arrangement according to claim 12 wherein said guide rail is fixedly mounted to at least one of said arms.
15. A surgical chisel for use in the method of claim 1, said chisel including:  
20 a shaft having a hollow portion adjacent a cutting end;  
an abutment portion at the other end of said shaft;  
said hollow portion having tapering internal walls extending inwardly towards a central axis of the shaft to define a cutting edge at said cutting end.
16. A surgical chisel according to claim 15 wherein said hollow portion extends  
25 along a major portion of the length of said shaft.

17. A surgical chisel according to claim 16 wherein said shaft is generally circular in cross section.
18. A method of performing hip revision surgery on a patient, said method including the steps of:
- 5 a) exposing a femoral bone formation of said patient;
- b) applying at least one support means to said femoral bone formation to support the structure of femoral formation; and
- c) removing unwanted material from within said femoral bone formation.
19. A method according to claim 18 further including the step of:
- 10 d) extracting a first implant from within said femoral bone formation.
20. A method according to claim 18 further including the step of:
- e) inserting a second implant into said femoral bone formation.
21. A method according to claim 20 wherein said support means is a surgical clamp including two arms hingedly connected at substantially their proximal ends, each of said
- 15 arms respectively including one of a pair of opposable gripping formations at its distal end.
22. A method according to claim 21 wherein step a) includes exposing said femoral bone of said patient through at least two incisions adjacent said bone.
23. A method according to claim 22 wherein step b) includes applying said gripping
- 20 formations to said femoral bone formation through said at least two incisions adjacent said bone.

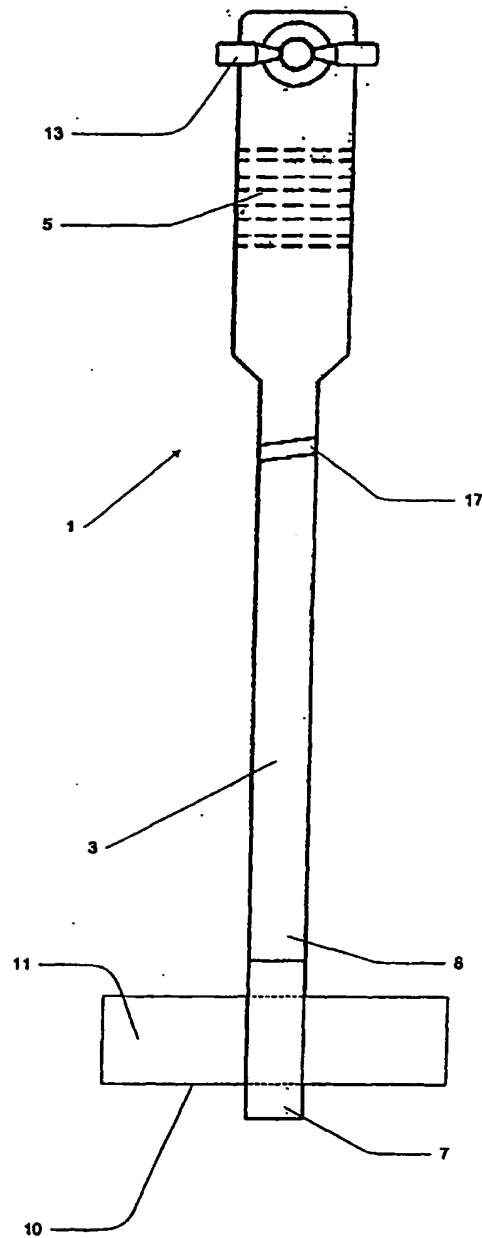**FIG. 1**

WO 2004/089181

2/6

PCT/AU2004/000486

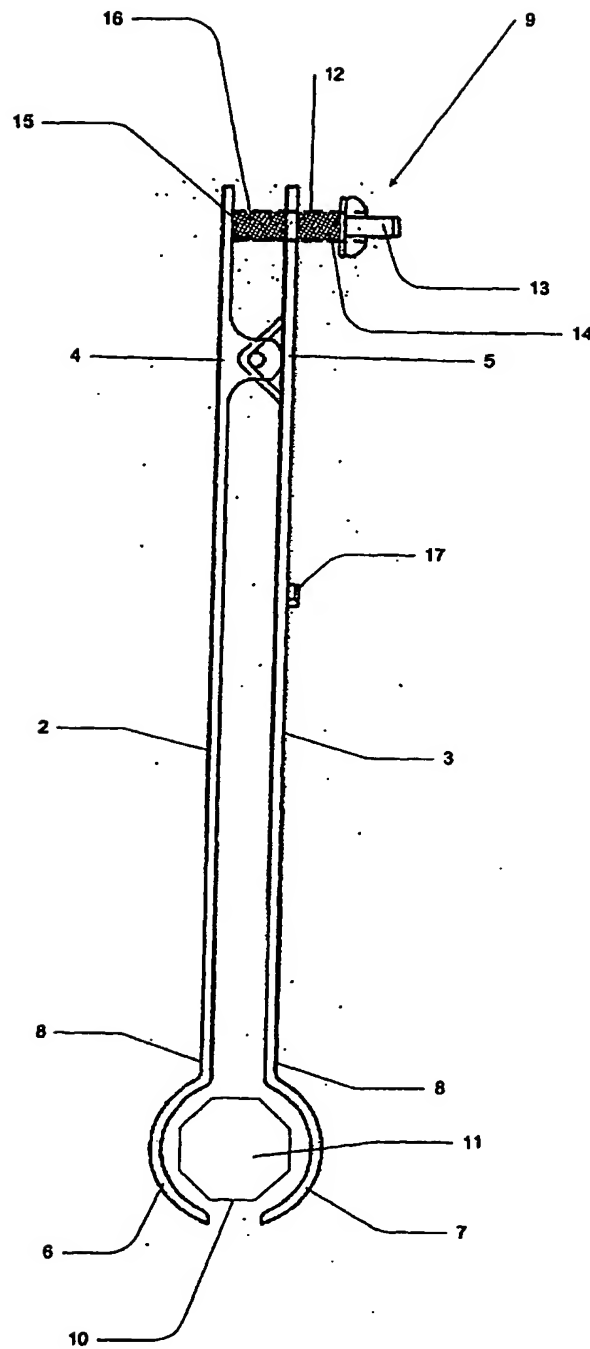


FIG. 2

WO 2004/089181

3/6

PCT/AU2004/000486

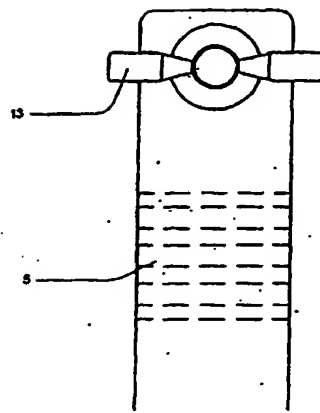


FIG. 3

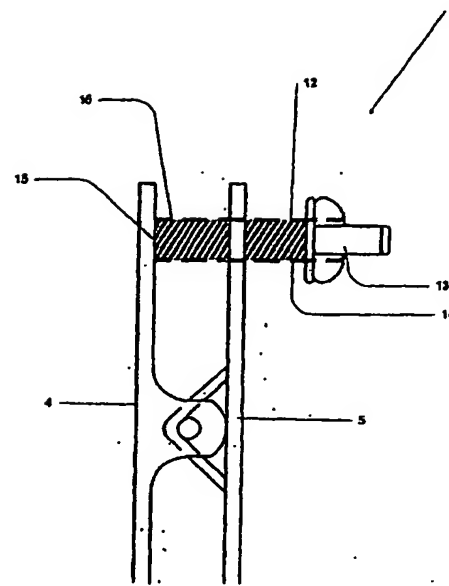
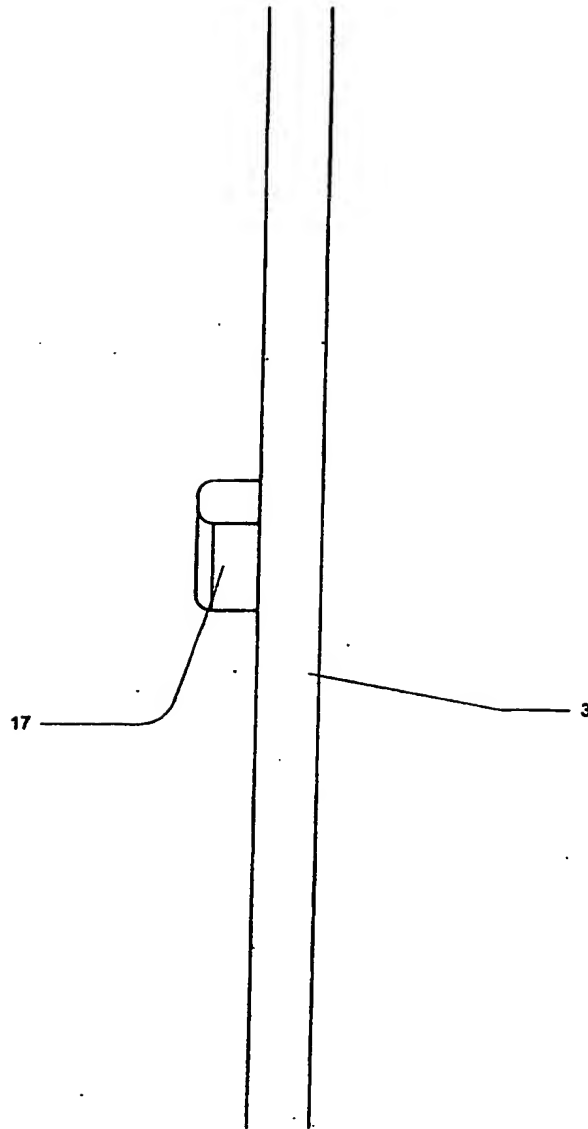


FIG. 4

WO 2004/089181

4/6

PCT/AU2004/000486




**FIG. 5**




WO 2004/089181

PCT/AU2004/000486

5/6

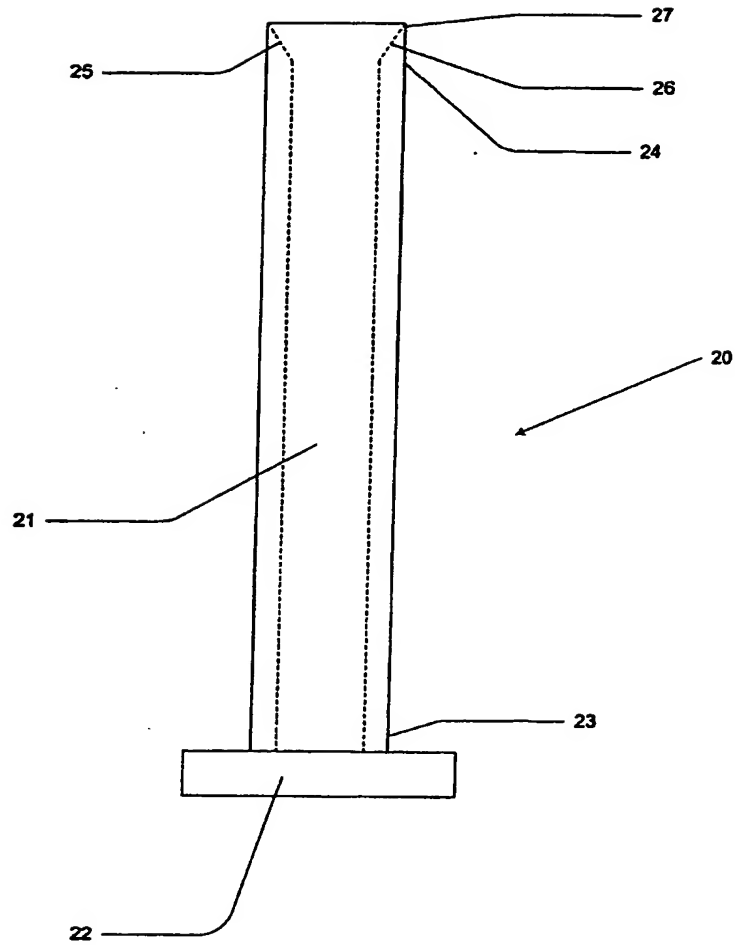**FIG. 6**

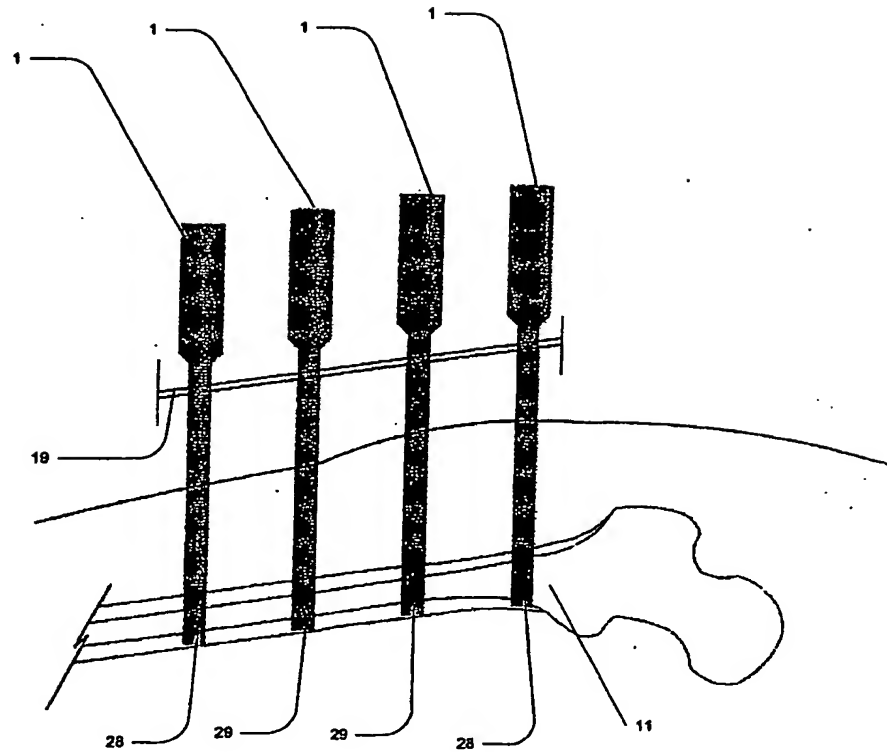**FIG. 7**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU2004/000486

## A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. <sup>7</sup>: A61B 17/15

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI: key words (bone, femur, remove, cement, bonding material, support, clamp, chisel etc)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6258095 B1 (LOMBARDO et al) 10 July 2001 See entire document	1-3, 18-20
X	WO 96/07361 A1 ( HUDSON SURGICAL DESIGN, INC) 14 March 1996 See entire document	1-6, 18-23
X	EP 0552578 B1 (BERGUE) 9 July 1997 See entire document	1-6, 18-22
X	US 6258096 B1 (SEKI) 10 July 2001 See entire document	1-3, 18-23

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

- \* Special categories of cited documents:
- |   |  |
|---|--|
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |
| "E" earlier application or patent but published on or after the international filing date   | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means  | "&" document member of the same patent family  |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |

Date of the actual completion of the international search  
6 August 2004

Date of mailing of the international search report

10 NOV 2004

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

SWAYAM CHINTAMANI  
Telephone No : (02) 6283 2202

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU2004/000486

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5312409 A (MCLAUGHLIN et al) 17 May 1994 See entire document	1-8, 18-23
X	US 5885298 A (HERRINGTON et al) 23 March 1999 See figures 2, 10-12	1-3
A	US 5713906 A (GROTHUES-SPORK et al) 3 February 1998 See abstract	15-17

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/AU2004/000486**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	6258095	EP	0947169	JP	11313844
US	6258095	US	2001001121		
WO	9607361	AU	19615/97	AU	21257/97
		AU	35432/95		
		CA	2198915	EP	0778751
		EP	0888089		
		US	5514139	US	5597379
		US	5643272		
		US	5755803	US	5810827
		US	5879354		
		US	6056754	US	6197064
		US	2002029038		
		WO	9729703	WO	9729704
EP	0552578	FR	2685855		
US	6258096	JP	2000287983		
US	5312409				
US	5885298				
US	5713906	AU	67956/94	DE	4416377
		WO	9426176		
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**